


Deck 3

On Deck 3, there is now only one end post at the corners. The posts next to the house butt right up to it so the back sides of those posts are not accessible. Run #1 is still outside to outside, so it will take the same configuration as on Deck 1. Runs #2 and #3 will need to connect to the *inside* of the corner post going back toward the house to keep the cables on the same plane. They will also need to connect to the *inside* of the posts next to the house as well.

Options for *inside-of-post to inside-of-post* configuration in Runs #2 and #3:

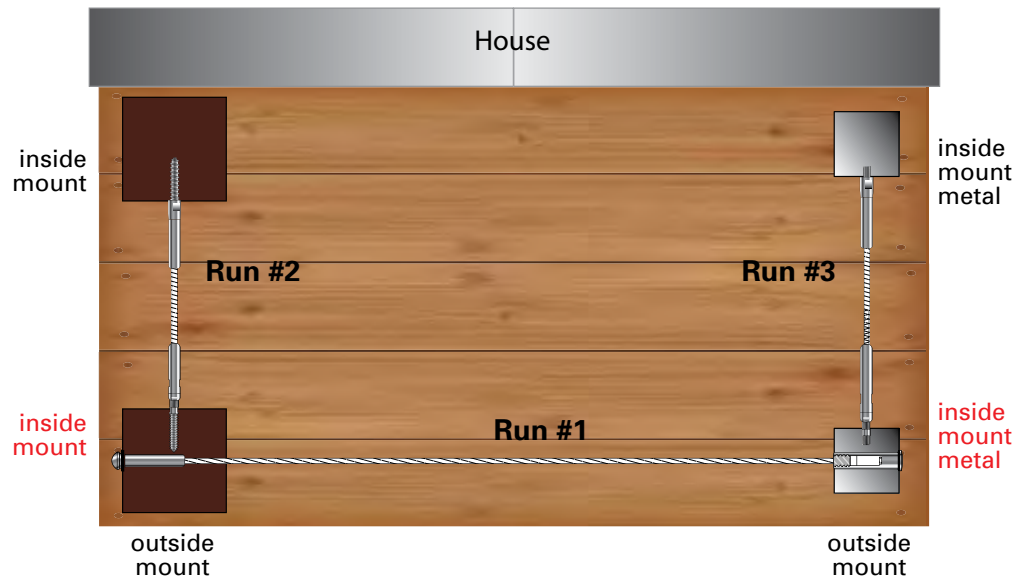

If wood posts, use the 300 series.

The tensioning device is an Adjust-a-Body® with Hanger Bolt, which lags into the wood post on one end. A Push-Lock Lag is lagged into the other end.



If metal posts, use the 401 series.

The tensioning device is an Adjust-a-Body with Threaded Bolt, which threads into the metal post on one end. A Push-Lock Threaded Bolt is threaded into the other end.



Railing Kits for Deck 3

Cable Length	1/8" cable		3/16" cable	
	wood post	any size metal post	wood post	any size metal post
	PART NO.	PART NO.	PART NO.	PART NO.
5'	30005	40105	30005-6	40105-6
10'	30010	40110	30010-6	40110-6
15'	30015	40115	30015-6	40115-6
20'	30020	40120	30020-6	40120-6
25'	30025	40125	30025-6	40125-6